


เหล็กรัดสายแวนเลส

SU 6

WORM DRIVE HOSE CLIP

เหล็กรัดสายแวนเลส

WORM DRIVE HOSE CLIP

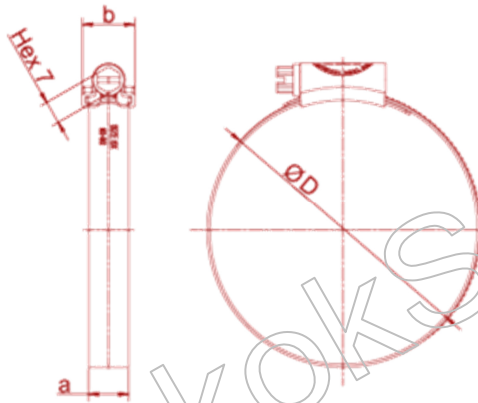

มาตรฐาน -

วัสดุ SUS304

ชุบผิว -

รหัสสินค้า เหล็กรัดสายแวนเลส 04-052

รายละเอียด

NO.	ใช้กับท่อหุน	ใช้กับท่อมีล	ขอบ	NO.	ใช้กับท่อหุน	ใช้กับท่อมีล	ขอบ
# 4	3/8" - 5/8"	10 - 16 mm	8	# 60	3.5/16" - 4.1/4"	84 - 108 mm	12.7
# 6	1/2" - 3/4"	13 - 19 mm	8	# 64	3.9/16" - 4.1/2"	91 - 114 mm	12.7
# 8	1/2" - 7/8"	16 - 23 mm	8	# 72	4.1/8" - 5"	105 - 127 mm	12.7
# 10	9/16" - 1.1/16"	14 - 27 mm	12.7	# 80	4.5/8" - 5.1/2"	118 - 140 mm	12.7
# 12	11/16" - 1.1/4"	18 - 32 mm	12.7	# 88	5.9/16" - 6"	130 - 152 mm	12.7
# 16	13/16" - 1.1/2"	21 - 38 mm	12.7	# 96	5.9/16" - 6.1/2"	141 - 165 mm	12.7
# 20	13/16" - 1.3/4"	19 - 44 mm	12.7	# 104	6.1/8" - 7"	156 - 178 mm	12.7
# 24	1.1/16" - 2"	32 - 51 mm	12.7	8"	6.1/2" - 8"	165 - 203 mm	12.7
# 28	1.5/16" - 2.1/4"	38 - 57 mm	12.7	9"	8.1/8" - 9.1/4"	200 - 230 mm	12.7
# 32	1.9/16" - 2.1/2"	40 - 64 mm	12.7	10"	9.1/8" - 10.1/4"	225 - 260 mm	12.7
# 36	1.13/16" - 2.3/4"	46 - 70 mm	12.7	11"	10.1/8" - 11.1/4"	255 - 280 mm	12.7
# 40	2.1/16" - 3"	57 - 76 mm	12.7	12"	11.1/8" - 12.1/4"	275 - 305 mm	12.7
# 44	2.5/16" - 3.1/4"	67 - 83 mm	12.7	13"	12.1/8" - 13.1/4"	300 - 330 mm	12.7
# 48	2.9/16" - 3.1/2"	65 - 89 mm	12.7	14"	13.1/8" - 14.1/4"	325 - 360 mm	12.7
# 52	2.13/16" - 3.3/4"	72 - 95 mm	12.7	15"	14.1/8" - 15.1/4"	355 - 385 mm	12.7
# 56	3.1/16" - 4"	78 - 101 mm	12.7	16"	15.1/8" - 16.1/4"	380 - 410 mm	12.7