


แหวนล็อกใน

๖ 6

INTERNAL RETAINER RING-RTW

แหวนล็อกใน

INTERNAL RETAINER RING-RTW

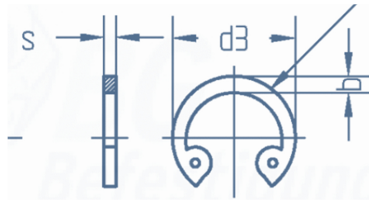

มาตรฐาน DIN 472, JIS B2804

วัตถุดิบ เหล็ก

ชุบผิว ชุบดำ

รหัสสินค้า แหวนล็อกใน 03-014

✓ AVAILABLE SIZE

ขนาดรู No. (mm.)	d3 ขอบนอก mm.	S หนา mm.		ขนาดรู No. (mm.)	d3 ขอบนอก mm.	S หนา mm.		ขนาดรู No. (mm.)	d3 ขอบนอก mm.	S หนา mm.	
6	6.7	-	✓	21	22.5	1.0	✓	36	38.8	1.5	✓
7	7.7	-	✓	22	23.5	1.0	✓	37	39.8	1.5	✓
8	8.8	0.4	✓	23	24.5	1.2	✓	38	40.8	1.5	✓
9	9.8	0.6	✓	24	25.9	1.2	✓	39	42.0	1.75	✓
10	10.7	1.0	✓	25	26.9	1.2	✓	40	43.5	1.75	✓
11	11.8	1.0	✓	26	27.9	1.2	✓	42	45.5	1.75	✓
12	13.0	1.0	✓	27	29.0	1.2	✓	45	48.5	1.75	✓
13	14.1	1.0	✓	28	30.1	1.2	✓	46	49.6	1.75	✓
14	15.1	1.0	✓	29	31.1	1.2	✓	47	50.5	1.75	✓
15	16.2	1.0	✓	30	32.1	1.2	✓	48	51.5	1.75	✓
16	17.3	1.0	✓	31	33.5	1.2	✓	50	54.2	2.0	✓
17	18.3	1.0	✓	32	34.4	1.2	✓	52	56.2	2.0	✓
18	19.5	1.0	✓	33	35.6	1.2	✓	55	59.2	2.0	✓
19	20.5	1.0	✓	34	36.5	1.5	✓	56	60.2	2.0	✓
20	21.5	1.0	✓	35	37.8	1.5	✓	58	62.2	2.0	✓


แหวนล็อกใน (ต่อ)

๖ 6

INTERNAL RETAINER RING-RTW

แหวนล็อกใน (ต่อ)

INTERNAL RETAINER RING-RTW

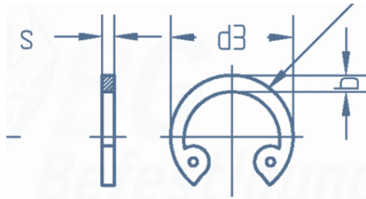

มาตรฐาน DIN 472, JIS B2804

วัตถุดิบ เหล็ก

ชุบผิว ชุบดำ

รหัสสินค้า แหวนล็อกใน 03-014

☑ AVAILABLE SIZE

ขนาดรู No. (mm.)	d3 ขอบนอก mm.	S หนา mm.		ขนาดรู No. (mm.)	d3 ขอบนอก mm.	S หนา mm.		ขนาดรู No. (mm.)	d3 ขอบนอก mm.	S หนา mm.	
60	64.2	2.0	☑	100	105.0	3.0	☑	170	179.5	4.0	☑
62	66.2	2.0	☑	102	108.0	4.0	☑	175	184.5	4.0	☑
63	67.2	2.0	☑	105	112.0	4.0	☑	180	189.5	4.0	☑
65	68.2	2.5	☑	108	115.0	4.0	☑	185	194.5	4.0	☑
68	72.5	2.5	☑	110	117.0	4.0	☑	190	199.5	4.0	☑
70	74.5	2.5	☑	112	119.0	4.0	☑	195	204.5	4.0	☑
72	76.5	2.5	☑	115	122.0	4.0	☑	200	209.5	4.0	☑
75	79.5	2.5	☑	120	127.0	4.0	☑	210	222.0	5.0	☑
78	82.5	2.5	☑	125	132.0	4.0	☑	220	232.0	5.0	☑
80	85.5	2.5	☑	130	137.0	4.0	☑	230	242.0	5.0	☑
82	87.5	2.5	☑	135	142.0	4.0	☑	240	252.0	5.0	☑
85	90.5	3.0	☑	140	147.0	4.0	☑	250	262.0	5.0	☑
88	93.5	3.0	☑	145	152.0	4.0	☑	260	275.0	5.0	☑
90	95.5	3.0	☑	150	158.0	4.0	☑	270	285.0	5.0	☑
92	97.5	3.0	☑	155	164.0	4.0	☑	280	295.0	5.0	☑
95	100.5	3.0	☑	160	169.0	4.0	☑	290	305.0	5.0	☑
98	103.5	3.0	☑	165	174.5	4.0	☑	300	315.0	5.0	☑