


แหวนสปริงงาน

๑ 14

DISC SPRING

แหวนสปริงงาน

DISC SPRING

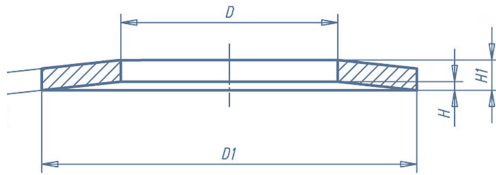

มาตรฐาน -

วัตถุประสงค์ เหล็ก

ชุบผิว

รหัสสินค้า แหวนสปริงงาน 03-049

ขนาด	D		D1		DBH (Heavy Duty)				DBL (Light Duty)				AVAILABLE
	Basic	Tol.	Basic	Tol.	Basic	E	H	H1	Basic	E	H	H1	
M 4	4.2	+0.3 -0.1	8	±0.3	0.4	±0.04	0.2	0.6	0.3	±0.03	0.25	0.55	✓
M 5	5.2	+0.3 -0.1	10	±0.3	0.5	±0.04	0.25	0.75	0.4	±0.04	0.3	0.7	✓
M 6	6.2	+0.3 -0.1	12.5	±0.3	0.7	±0.05	0.3	1	0.5	±0.04	0.35	0.85	✓
M 7	7.2	+0.3 -0.1	14	±0.3	0.8	±0.05	0.3	1.1	0.5	±0.04	0.4	0.9	✓
M 8	8.2	+0.3 -0.1	16	±0.3	0.9	±0.06	0.35	1.25	0.6	±0.05	0.45	1.05	✓
M 9	9.2	+0.3 -0.1	18	±0.3	1	±0.06	0.4	1.4	0.7	±0.05	0.5	1.2	✓
M 10	10.2	+0.4 -0.1	20	±0.4	1	±0.06	0.45	1.45	0.8	±0.05	0.55	1.35	✓
M 11	11.2	+0.4 -0.1	22.5	±0.4	1.2	±0.07	0.5	1.7	0.8	±0.05	0.65	1.45	✓
M 12	12.2	+0.4 -0.1	25	±0.4	1.5	±0.07	0.55	2.05	0.9	±0.06	0.7	1.6	✓
M 14	14.2	+0.4 -0.1	28	±0.4	1.5	±0.07	0.65	2.15	1	±0.06	0.8	1.8	✓
M 16	16.3	+0.5 -0.2	31.5	±0.5	1.75	±0.08	0.7	2.45	1.2	±0.07	0.9	2.1	✓
M 18	18.3	+0.5 -0.2	35.5	±0.5	2	±0.08	0.8	2.8	1.2	±0.07	1	2.2	✓
M 20	20.4	+0.5 -0.2	40	±0.5	2	±0.08	0.9	2.9	1.5	±0.07	1.15	2.65	✓
M 22	22.4	+0.5 -0.2	45	±0.5	2.5	±0.1	1	3.5	1.75	±0.08	1.13	3.05	✓
M 25	25.4	+0.5 -0.2	50	±0.5	3	±0.12	1.1	4.1	2	±0.08	1.4	3.4	✓
M 28	28.5	+0.5 -0.2	56	±0.5	3	±0.12	1.3	4.3	2	±0.08	1.6	3.6	✓
M 30	31	+0.6 -0.4	63	±0.6	3.5	±0.12	1.4	4.9	2.5	±0.1	1.75	4.25	✓
M 35	36	+0.6 -0.4	71	±0.6	4	±0.12	1.6	5.6	2.5	±0.1	2	4.5	✓
M 40	41	+0.6 -0.4	80	±0.6	5	±0.15	1.7	6.7	3	±0.12	2.3	5.3	✓
M 45	46	+0.6 -0.4	91	±0.6	5	±0.15	2	7	3.5	±0.12	2.5	6	✓
M 50	51	±0.7	100	±0.7	6	±0.15	2.2	8.2	3.5	±0.12	2.8	6.3	✓